


## Project description - sprint 1

The team is enrolled in a structured cabling project, the outcome for this sprint is a structured cabling deployment plan for the given physical environment. The project owner role is assumed by the laboratory classes' teacher.

### 1. Physical environment description

The structured cabling project is to embrace an industrial private closed area with five buildings, they all have two floors. These buildings are numbered/designated as 1, 2, 3, 4, and 5.

The schematic plan below shows how those buildings are implanted in the area. An underground technical ditch with cable raceways (in light blue) exists and includes cable passage ways for all buildings, it's ready for telecommunications cabling and others.

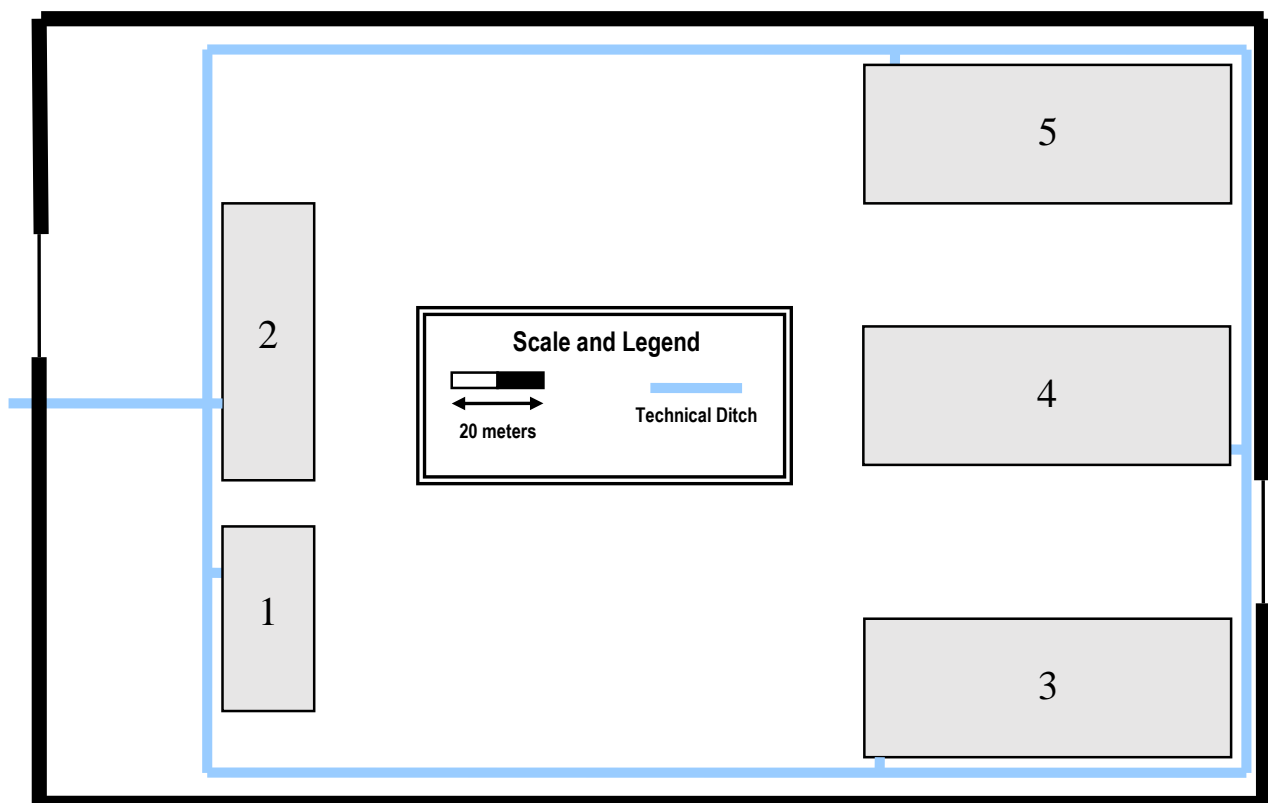


- The building 1 horizontal dimensions are, approximately, 40 x 20 meters.
- The building 2 horizontal dimensions are, approximately, 60 x 20 meters.
- Buildings 3, 4, and 5 horizontal dimensions are, approximately, 80 x 30 meters.

# 1.1. Building 1

The building 1 is committed to house the datacentre, it will also house the main cross-connect for the structured cabling system. Both floors should have wireless LAN coverage (Wi-Fi).

## 1.1.1. Building 1 - Ground floor


The ground floor is provided with an underfloor cable raceway connected to the external technical ditch. Access to the underfloor cable raceway is available at points marked over the plan. Multiple cable passageways are available to the above floor where the datacentre is housed.

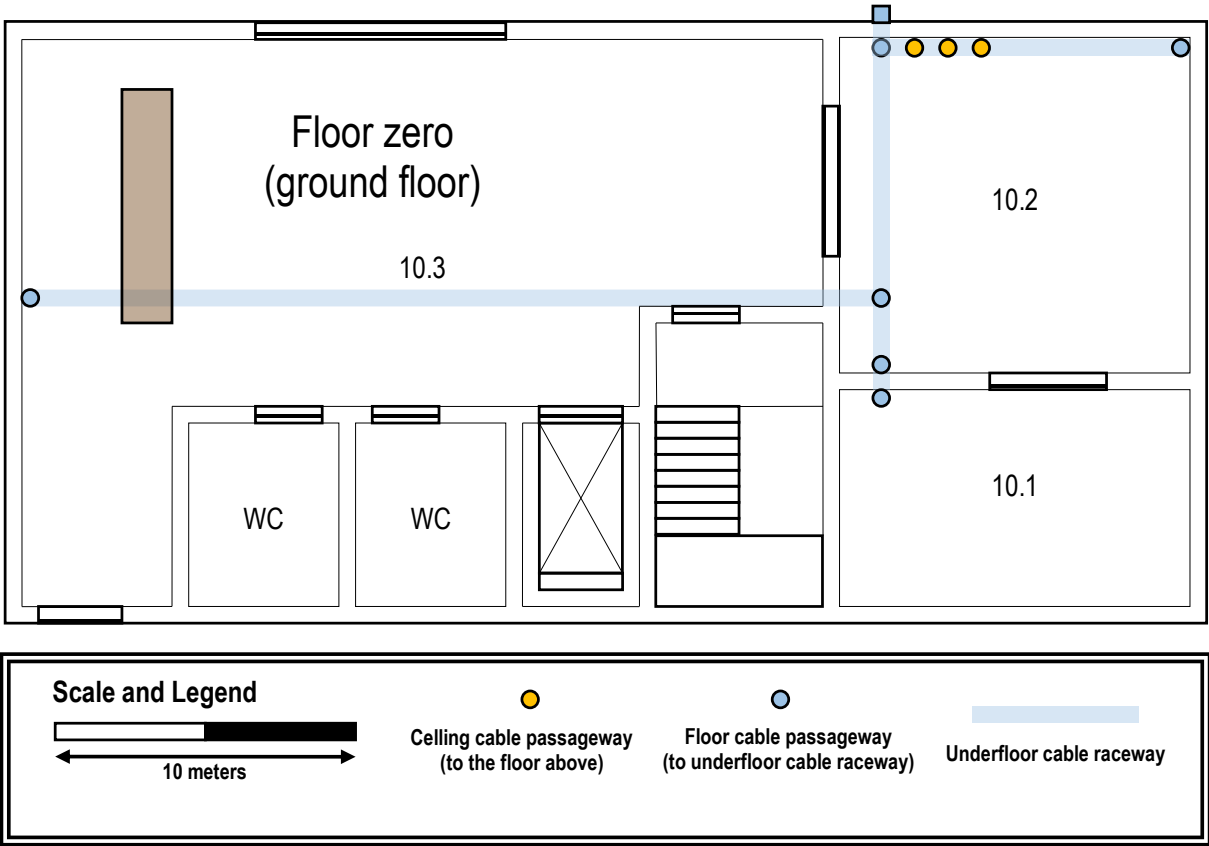

The ceiling height on this floor is 4 meters. The 10.3 entrance area requires no network outlets, except for the entrance desk (in brown) where 5 outlets should be available, elsewhere the standard number of outlets per area rates should be honoured.

### 1.1.2. Building 1 - Floor 1

This floor also has an underfloor cable raceway. Access to the underfloor cable raceway is available at points marked over the plan. The ceiling height on this floor is 3 meters.

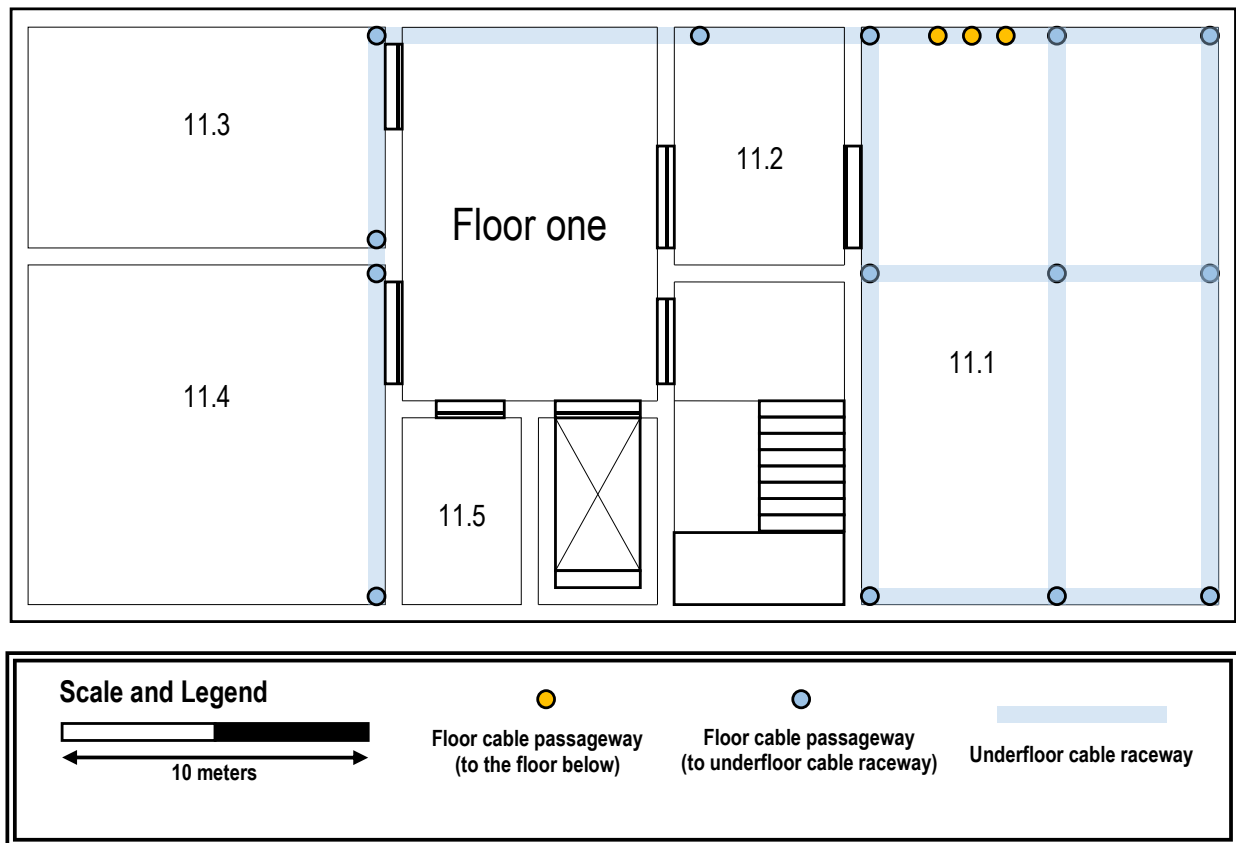


The 11.1 area is will house the datacentre itself, wiring and outlets there, are out of scope of this project. Room 11.5 is for storage and no outlets are required there, elsewhere the standard number of outlets per area rates should be honoured.

## 1.2. Building 2

This building households several administrative services and offices. Both floors require full wireless LAN coverage (Wi-Fi).

### 1.2.1. Building 2 - Ground floor


The ground floor is provided with an underfloor cable raceway connected to the external technical ditch. Access to the underfloor cable raceway is available at points marked over the plan. The ceiling height on this floor is 4 meters.

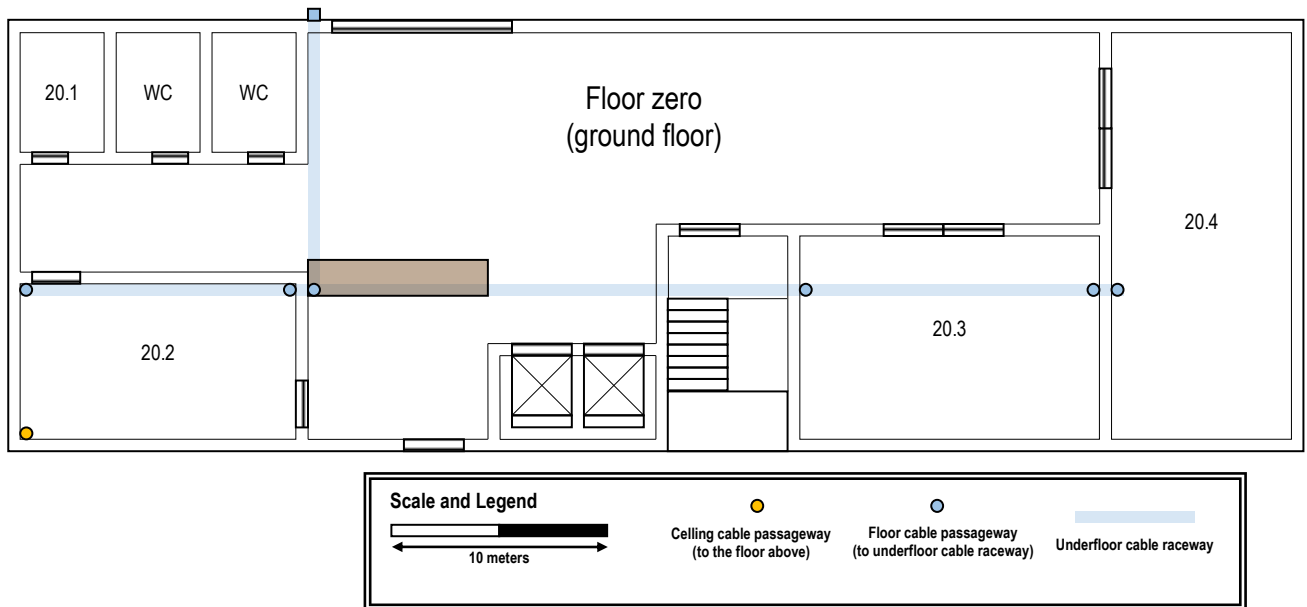

Room 20.1 is a storage area and network outlets are not required there, the same applies to restrooms. Regarding the entrance hall, network outlets are required only on the service desk (marked in brown).

### 1.2.2. Building 2 - Floor 1


This floor has no underfloor cable raceway. The ceiling height on this floor is 3 meters, however there's a removable dropped ceiling, placed 2.5 meters from the ground, covering the entire floor. The space over the dropped ceiling is perfect to install cable raceways.

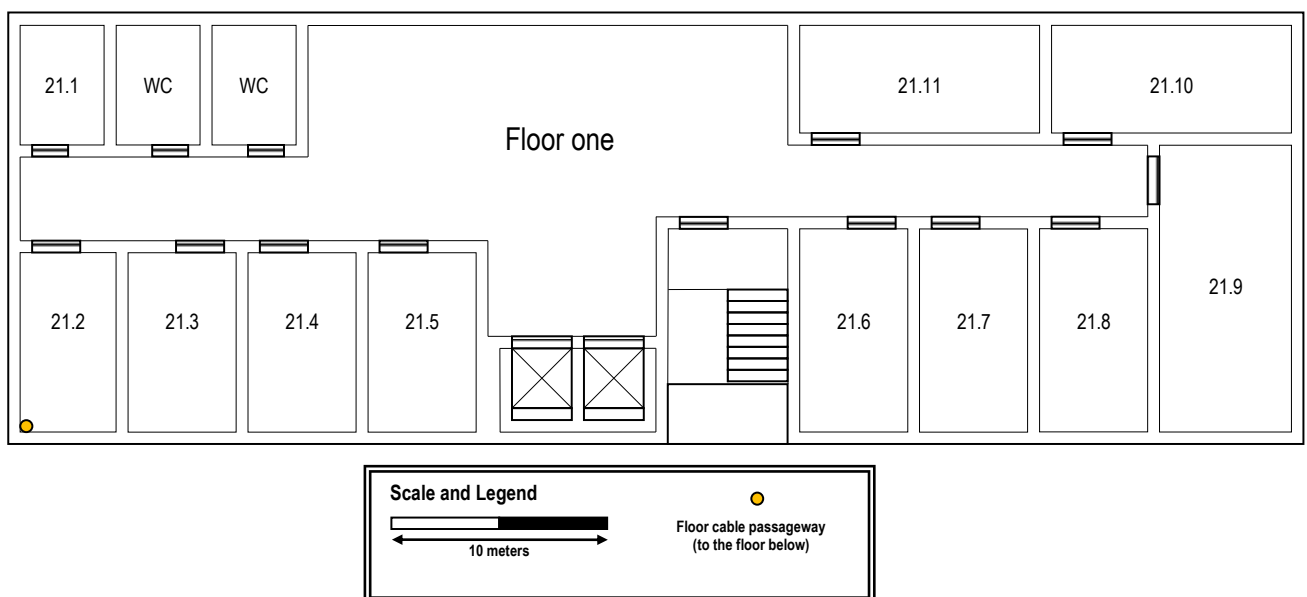

### 1.3. Building 3

In this building, the left area (divided in rooms) has two floors, the right open area has a single floor whose height encompasses both left area floors. A full wireless LAN (Wi-Fi) coverage is required for this building.


#### 1.3.1. Building 3 - Ground floor

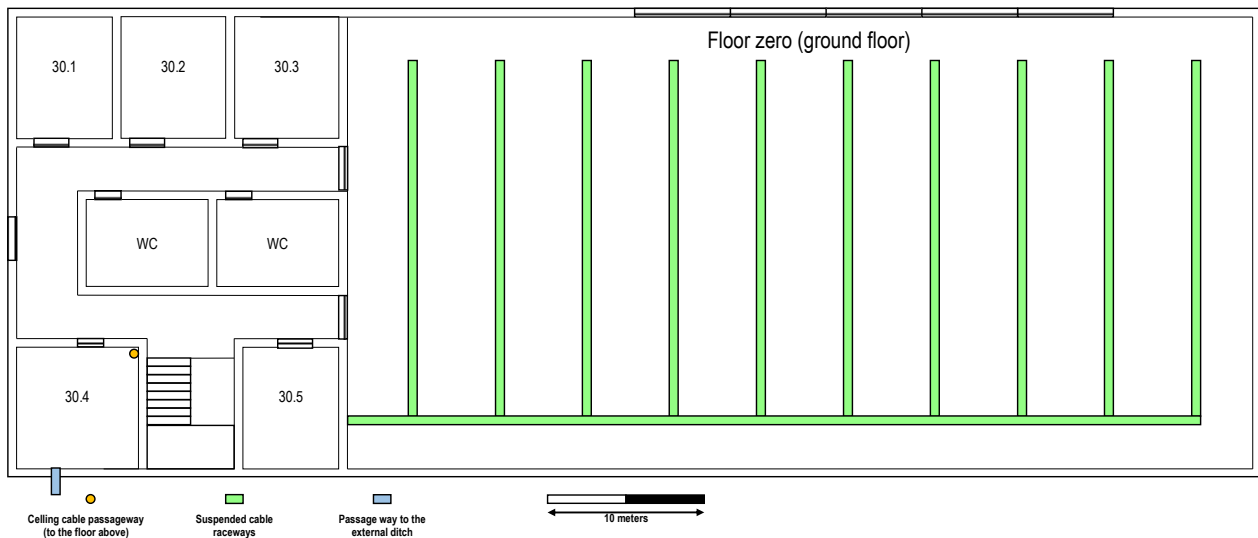

Room 30.4 has a pass way to the external technical ditch. The left area ceiling height is 3 meters, with a removable dropped ceiling placed 2.5 meters from the ground, covering that entire left area. On the left side, common areas are not required to have network outlets, elsewhere the standard number of outlets per area rate is to be used.

The right side open area has a ceiling height of 6.5 meters, however, there's a grid of suspended communications cable raceways (represented in green), placed 3 meters from the ground. On these suspended cable raceways, network outlets are to be directly attached and provide a homogenous coverage of the entire open space, following the standard number of outlets per area rate.

#### 1.3.2. Building 3 - Floor one

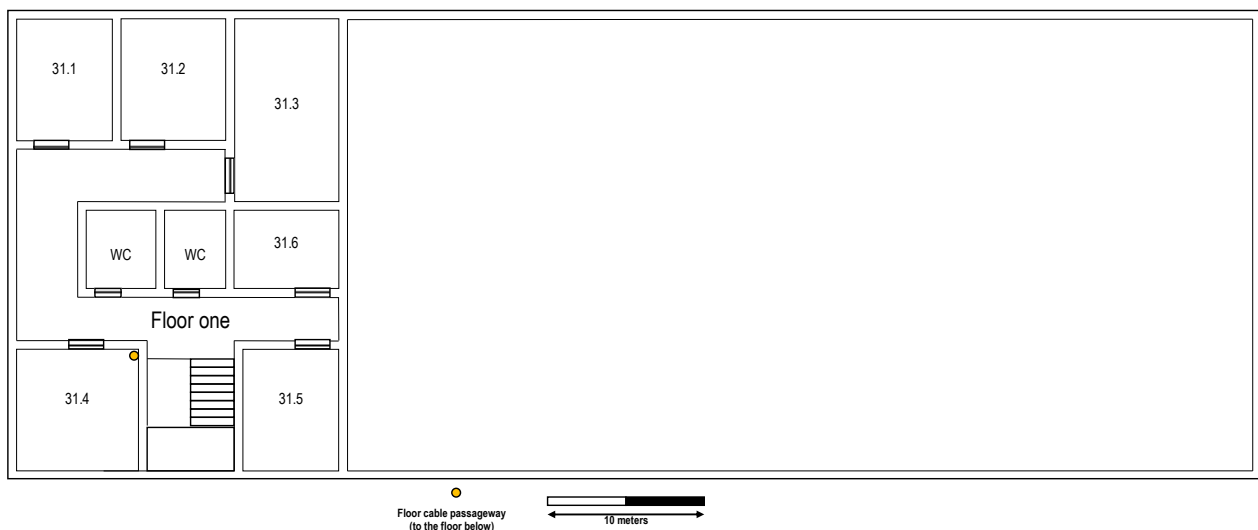


The ceiling height on this floor is 3 meters, but there's a removable dropped ceiling, placed 2.5 meters from the ground, covering this entire floor. Common areas are not required to have network outlets, rooms should be provided with the standard number of network outlets.

## 1.4. Building 4

In this building, the left area (divided in rooms) has two floors, the right open area has a single floor whose height encompasses both left area floors. A full wireless LAN (Wi-Fi) coverage is required for this building.

### 1.4.1. Building 4 - Ground floor

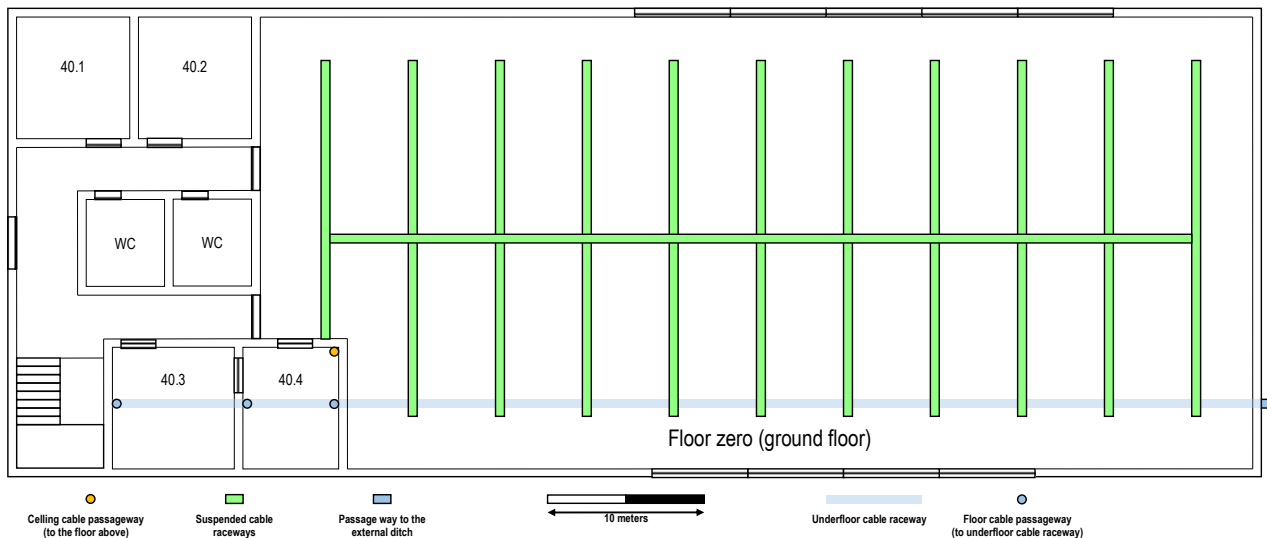

The ground floor is provided with an underfloor cable raceway connected to the external technical ditch. Access to the underfloor cable raceway is available at points marked over the plan.

The left area ceiling height on this floor is 3 meters with a removable dropped ceiling, placed 2.5 meters from the ground and covering that entire left area. On the left side, common areas are not required to have network outlets, elsewhere the standard number of outlets per area rate is to be used.

The right side open area has a ceiling height of 6.5 meters, however, there's a grid of suspended communications cable raceways (represented in green), placed 3 meters from the ground. On these suspended cable raceways, network outlets are to be directly attached and provide a homogenous coverage of the entire open space, following the standard number of outlets per area rate.

### 1.4.2. Building 4 - Floor one




The ceiling height on this floor is 3 meters, but there's a removable dropped ceiling, placed 2.5 meters from the ground, covering this entire floor. Common areas are not required to have network outlets, rooms should be provided with the standard number of network outlets.

## 1.5. Building 5

In this building, the left area (divided in rooms) has two floors, the right open area has a single floor whose height encompasses both left area floors. A full wireless LAN (Wi-Fi) coverage is required for this building.


### 1.5.1. Building 5 - Ground floor

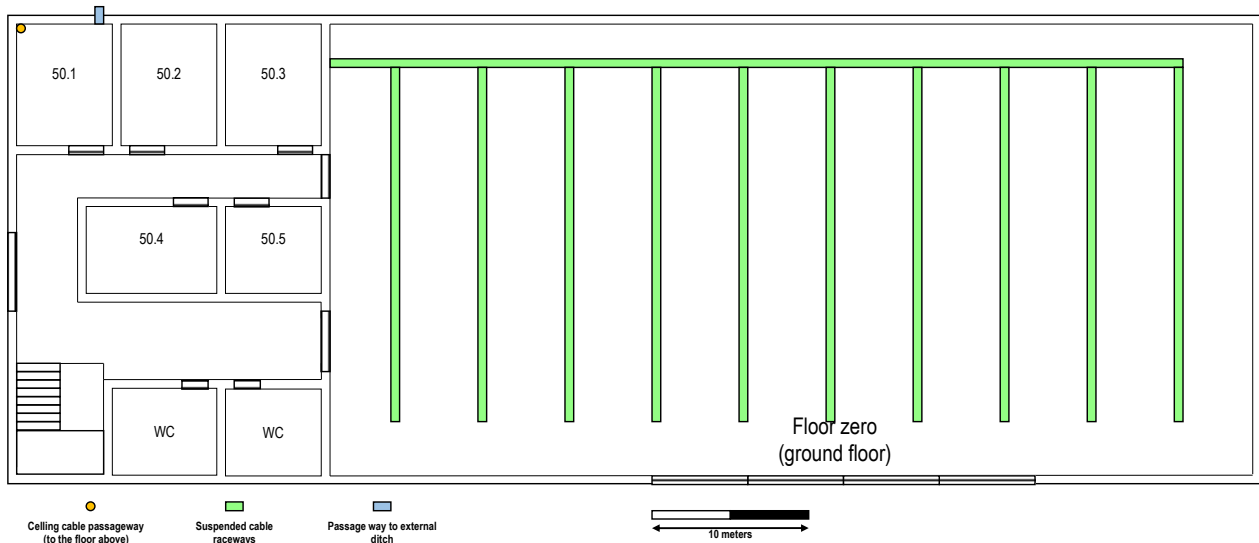

Room 50.1 has a pass way to the external technical ditch. The left area ceiling height is 3 meters, with a removable dropped ceiling placed 2.5 meters from the ground, covering that entire left area. On the left side, common areas are not required to have network outlets, elsewhere the standard number of outlets per area rate is to be used.

The right side open area has a ceiling height of 6.5 meters, however, there's a grid of suspended communications cable raceways (represented in green), placed 3 meters from the ground. On these suspended cable raceways, network outlets are to be directly attached and provide a homogenous coverage of the entire open space, following the standard number of outlets per area rate.

### 1.5.2. Building 5 - Floor one

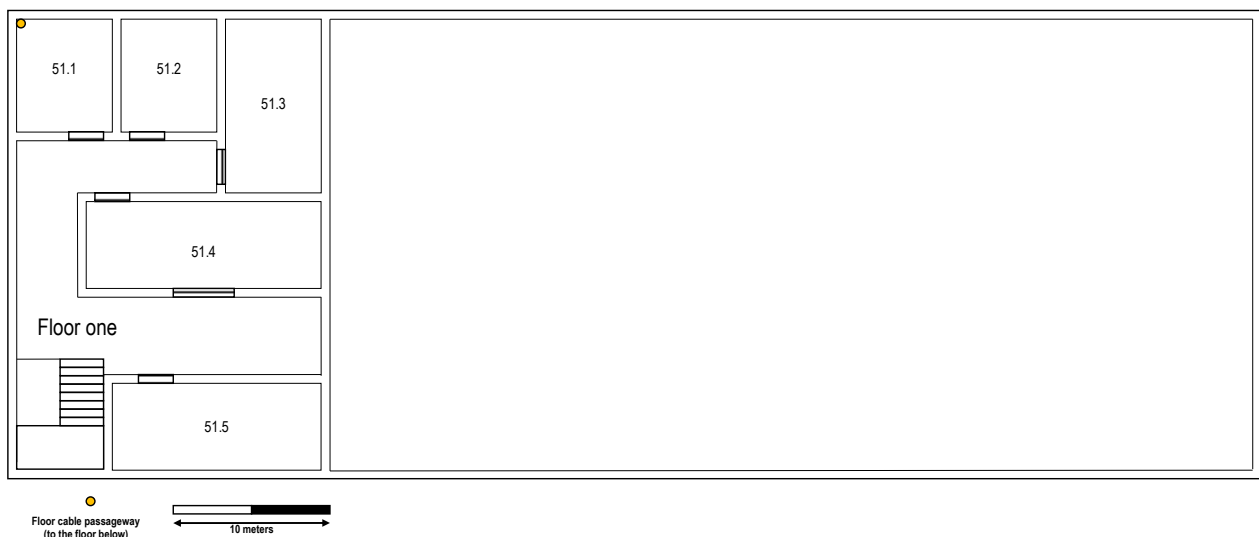

The ceiling height on this floor is 3 meters, but there's a removable dropped ceiling, placed 2.5 meters from the ground, covering this entire floor. Common areas are not required to have network outlets, rooms should be provided with the standard number of network outlets.

## 2. Sprint 1 backlog

Task	Task description
T.1.1	Development of a structured cabling project for building 1, and also encompassing the campus backbone.
T.1.2	Development of a structured cabling project for building 2.
T.1.3	Development of a structured cabling project for building 3.
T.1.4	Development of a structured cabling project for building 4.
T.1.5	Development of a structured cabling project for building 5.

Task T.1.5 is to be ignored by teams with only four members.

## 3. Sprint 1 outputs/products

For each task on this sprint, the output is a structured cabling project.

Each team member is free to provide this output in any desired format, it may be a single report or a set of items.

Whatever the format is, the following items are mandatory and will be subject of assessment:

- **Demonstration of calculations regarding the number of network outlets for each room.**
- **Network outlets deployment schematic plan (including outlets for wireless access points) and justification comments.**
- **Cross-connects deployment schematic plan and justification comments.**
- **Cable pathways deployment schematic plan and justification comments.**
- **Hardware inventories, including: total cable lengths by cable type, appropriate type patch panels, network outlets, telecommunication enclosures of suitable size.**

**Keywords: explain, justify, and demonstrate.**

The teacher's assessment is going to be focused on what is said to explain the solution.



## 4. Sprint 1 planning

- In the first laboratory class, the teacher will assign a number to each group, after that the team should create a BITBUCKET repository, [check the first laboratory class for details](#).
- One team member takes the **sprint master** role for sprint 1.

On each sprint, a different team member takes this role. If no other criterion is consensual, it's suggested that the sprint master role for sprint 1 should be taken by the member with the lowest student's number.

- Global technical decisions and team coordination.

Even though the tasks established in the sprint backlog are somewhat independent, because they all belong to the same project, a coordination effort in this phase is key. This will most often encompass technical decisions regarding the implementation with a special focus on features that are shared between tasks.

All taken technical decisions must be registered, by the sprint master, in file **/doc/sprint1/planning.md**.

For this specific sprint, some features to be settled now are:

- Copper cable wiring standard to be adopted (either 568A or 568B).
- Backbone cable types, cable passageways to be used, redundant links and others.

- Tasks assignment to team members.

Every member (sprint master included) is assigned exactly one task from the backlog. The provided backlog has five tasks, for teams with less than five members, the last task in the backlog is to be ignored, the first ones are mandatory.

The sprint master registers in file **/doc/sprint1/planning.md** the task assigned to each team member.

Notice that the tasks assignment in this first sprint is going to persist along the first three sprints, meaning tasks in the following sprints are the continuation of previous sprint's tasks and are to be carried out by the same team member.